



BOTTOM VIEW



mm [inches]

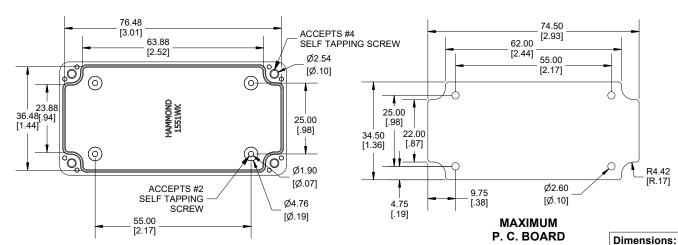

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.) Contact Factory (modshop@hammfg.com) for quotes Solid models of this enclosure available in .stp or .x t (Part number and text placement/orientation on our products are subject to change, we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, lid, gasket, 4 cover screws. Polycarbonate material is rated UL94 - V0

Recommended Torque: #4 Cover screw (71-100) Ozf.in / (50-70) cN.m Recommended Torque: #2 Internal screws (21-28) Ozf.in / (15-20) cN.m

PART NUMBERS	
1551WKFL Enclosure	
Polycarbonate Black Enclosure	1551WKFLBK
Polycarbonate Gray Enclosure	1551WKFLGY
ACCESSORIES	
Internal Mounting Post Screw [#2 x 3/16" Plastite Self-tapping (4.8mm)]	1553WTS100 (Pkg 100)
Stainless Steel Cover Screws [#4 X 3/8" Plastite Self-tapping (9.5mm)]	SC509-50 (Pkg 50)

